
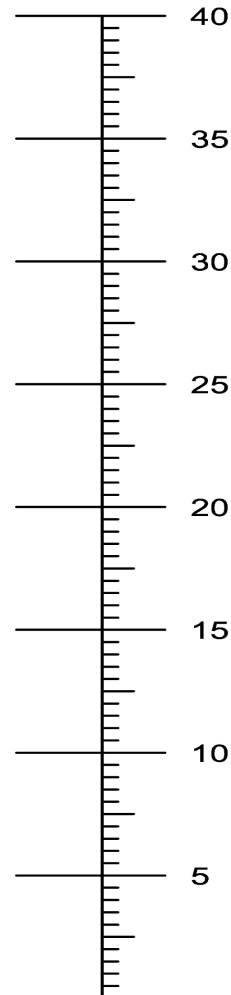


PERFORMANCE CURVE 1004

Fluid	Water	Rubber	Nitrile (NBR)	65 Shore
Temperature	20°C	Solids Handling (mm)		
Starting Torque	16 Nm / 11,8 lbf-ft	Hard Angular:	Ø=4,85	Soft and compr.: Ø=19,4

 Q [m³/h]

Q [gpm]

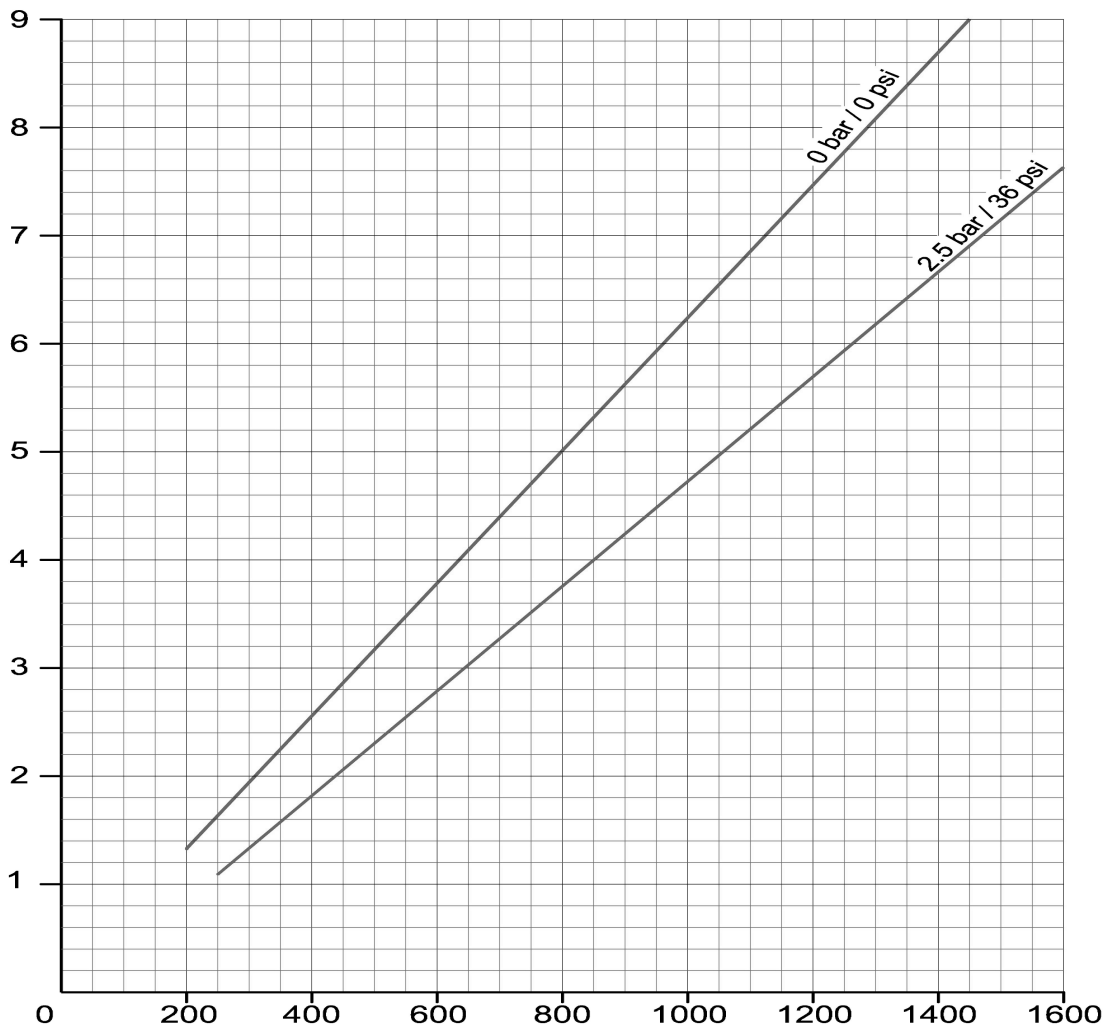


Data determined with water at 20°C, tolerance +10% / -5% relating to the final value.

 n [min⁻¹]

P [kW]

P [hp]

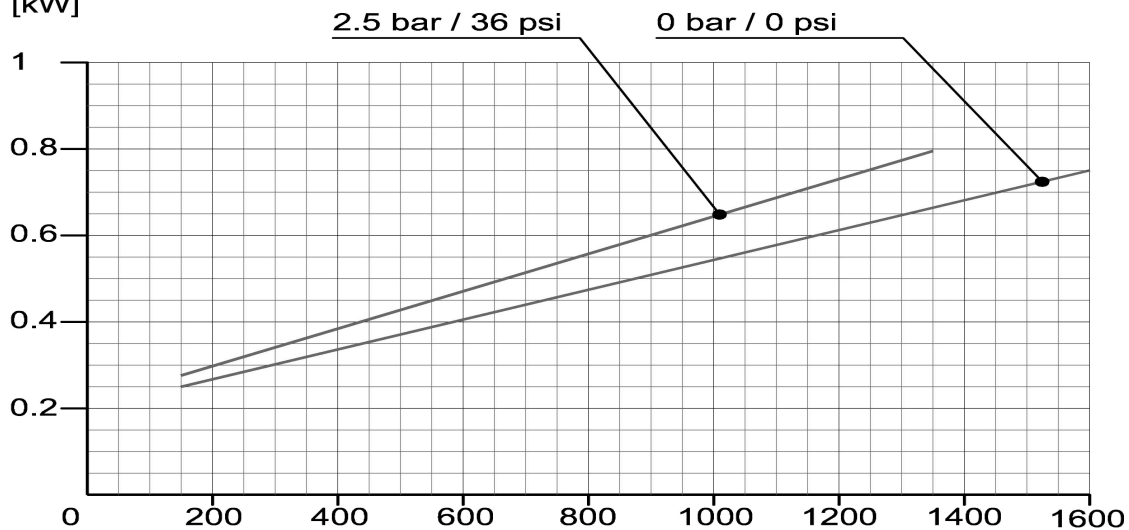
 n [min⁻¹]

SYDEX SRL