


AQUA TURBO® FRMD/MIX-SL

Floatables removal device + submerged Mixer

Radial mixing in conjunction with surface flow generated by the submersible pump draws foam/scum towards the basin center.

A special adjustable scum weir allows a laminar layer of foam/scum to enter the pump intake for discharge from the basin. Non-contaminating so ideal for disposal and reuse applications.

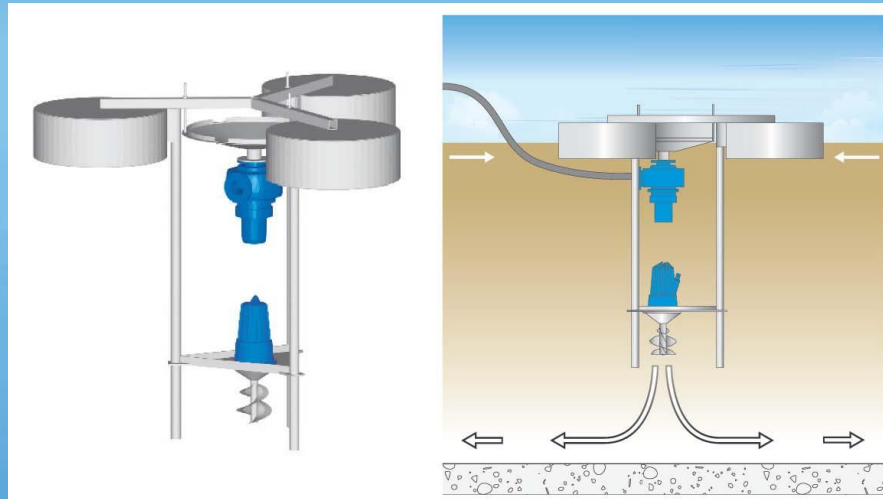

Applications :

Removal of bulking + old sludge
Removal + reuse of scum
Sludge stabilization + biogas
SBR

Features :

Adjustable flow rate
Purpose designed blockage free pump
Reliable + non-clogging impeller
Simple installation + removal

Range :

1.5 – 22kW EMOD motor - IP 68
4 + 6 Pole speeds, direct drive
Multiple pump flow rate options
AISI 304/316 or other SS

Configurations :

Float mount only
Vertical operation only
1 x Submerged drive + pump
Fixed or variable WL

Headquarters

AQUASYSTEMS INTERNATIONAL n.v.

Brusselsesteenweg 508 • B-1500 Halle - Belgium

Tel.: +32/02 362 02 62 • Fax : +32/02 360 35 89

E-mail : asi@aquaturbo.com • http://www.aquaturbo.com

Subsidiary

AQUATURBO SYSTEMS inc.

1754 Ford Avenue • AR72764 Springdale Arkansas

Tel. 001 479 927 1300 • Fax 0001 479 927 0700

E-mail : ats@aquaturbo.com • http://www.aquaturbo.com

Your local authorized distributor:

ETA Ekipman Teknoloji Ar. Sis. San. Tic. Ltd. Şti.

Çamlık Mah. Diñç Sok. No:4 D:83 PK.34774

Tel. 0216 540 99 64 • Fax. 0216 540 99 68

E-mail : info@etaekipman.com • http://www.etaekipman.com